

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.




Article number: WM-5225 C07
 Alternative products: WM-5265 C07,
 WM-5270 C07

Specifications

| | |
|--------------------------|--|
| Power source. | Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2 |
| Battery life | 10 h |
| Directivity | Cardioid |
| Microphone type. | Electret condenser |
| Directivity | Cardioid |
| Power source. | Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2 |
| Frequency range | 794 – 830 MHz |
| Selectable frequencies | 64 |
| Simultaneous channels | 16 |
| AF response | 100 Hz - 15 kHz |
| RF output power | 10 mW |
| Max. input level (value) | 126 dB SPL |
| Max. input level | 126 dB SPL |
| Finish. | Resin, black, |
| Operating humidity. | 30% - 85% |
| Operating temperature. | -10°C ... +50°C |

Appearance

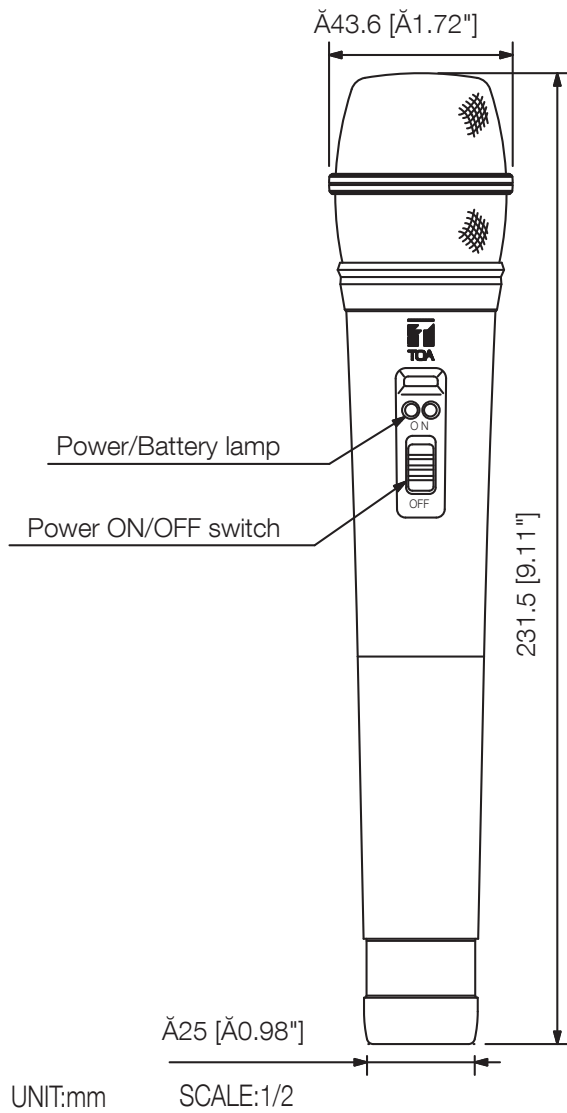

*

| Type | Frequency Range |
|-----------|----------------------|
| A01 | 692 - 722 MHz, UHF |
| B01, B02 | 722 - 752 MHz, UHF |
| C01 - C07 | 794 - 830 MHz, UHF |
| D01 - D05 | 830 - 865 MHz, UHF |
| E01 | 668 - 698 MHz, UHF |
| F01 | 636 - 666 MHz, UHF |
| G01, G02 | 606 - 636 MHz, UHF |
| H01 | 576 - 606 MHz, UHF |
| K01 | 925 - 937.5 MHz, UHF |

