

The WM-5270 Wireless Microphone employs a dynamic microphone capsule with high input handling capacity and is suitable for vocal application and other professional uses. Thanks to the PLL-synthesizer system, 16 different operating frequencies (4 banks) are made available. A high output power ensures stable radio signal transmission. The maximum input sound pressure can be set in the range of 130 dB SPL to 142 dB SPL by a PAD switch, permitting adaptation to wide range of input sound pressure.




Article number: WM-5270 C07
 Alternative products: WM-5265 C07,
 WM-5225 C07

Specifications

Power source.	Battery 1 AA size alkaline battery, 1.5 V
Battery life	10 h
Directivity	Cardioid
Microphone type.	Dynamic
Directivity	Cardioid
Power source.	Battery 1 AA size alkaline battery, 1.5 V
Frequency range	794 – 830 MHz
Selectable frequencies	64
Simultaneous channels	16
AF response	80 Hz - 15 kHz
RF output power	10 mW
Max. input level (value)	142 dB SPL
Max. input level	142 dB SPL
Finish.	Metal, dark grey,
Operating humidity.	30% - 85%
Operating temperature.	-10°C ... +50°C

Appearance

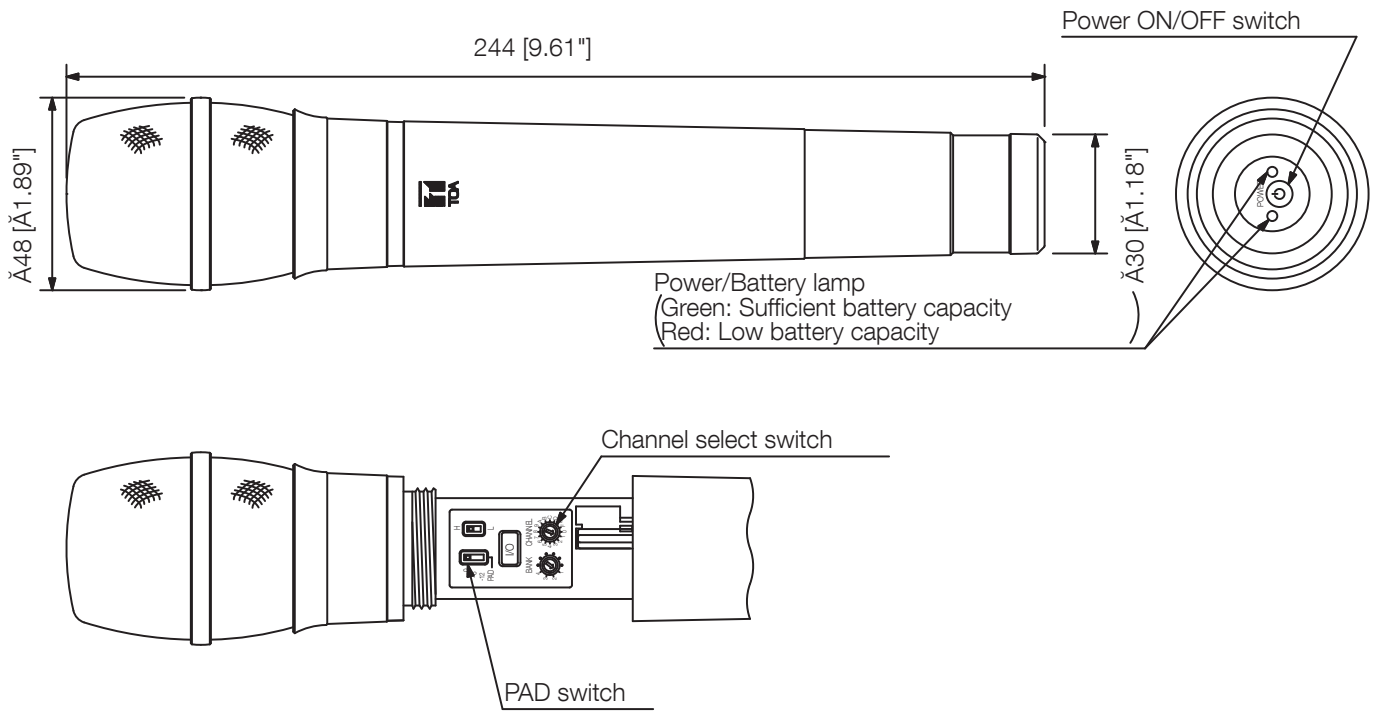

UNIT:mm

SCALE:1/2