

WM-D5200 -G1




Article number: WM-D5200 -G1
Alternative products: WM-D5200 -C7

Specifications

| | |
|--------------------------|--|
| Power source. | Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2 |
| Battery life | 8 h |
| Directivity | Unidirectional |
| Microphone type. | Electret condenser |
| Directivity | Unidirectional |
| Power source. | Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2 |
| Frequency range | 606-636 MHz |
| Selectable frequencies | 78 |
| Simultaneous channels | 32 |
| AF response | 100 Hz - 12 kHz |
| RF output power | 10 mW |
| Max. input level (value) | 132 dBSPL |
| Max. input level | 132 dBSPL |
| Finish. | ABS resin, black, |
| Operating humidity. | 30% - 85% |
| Operating temperature. | -10°C ... +50°C |

WM-D5200 -G1

Appearance

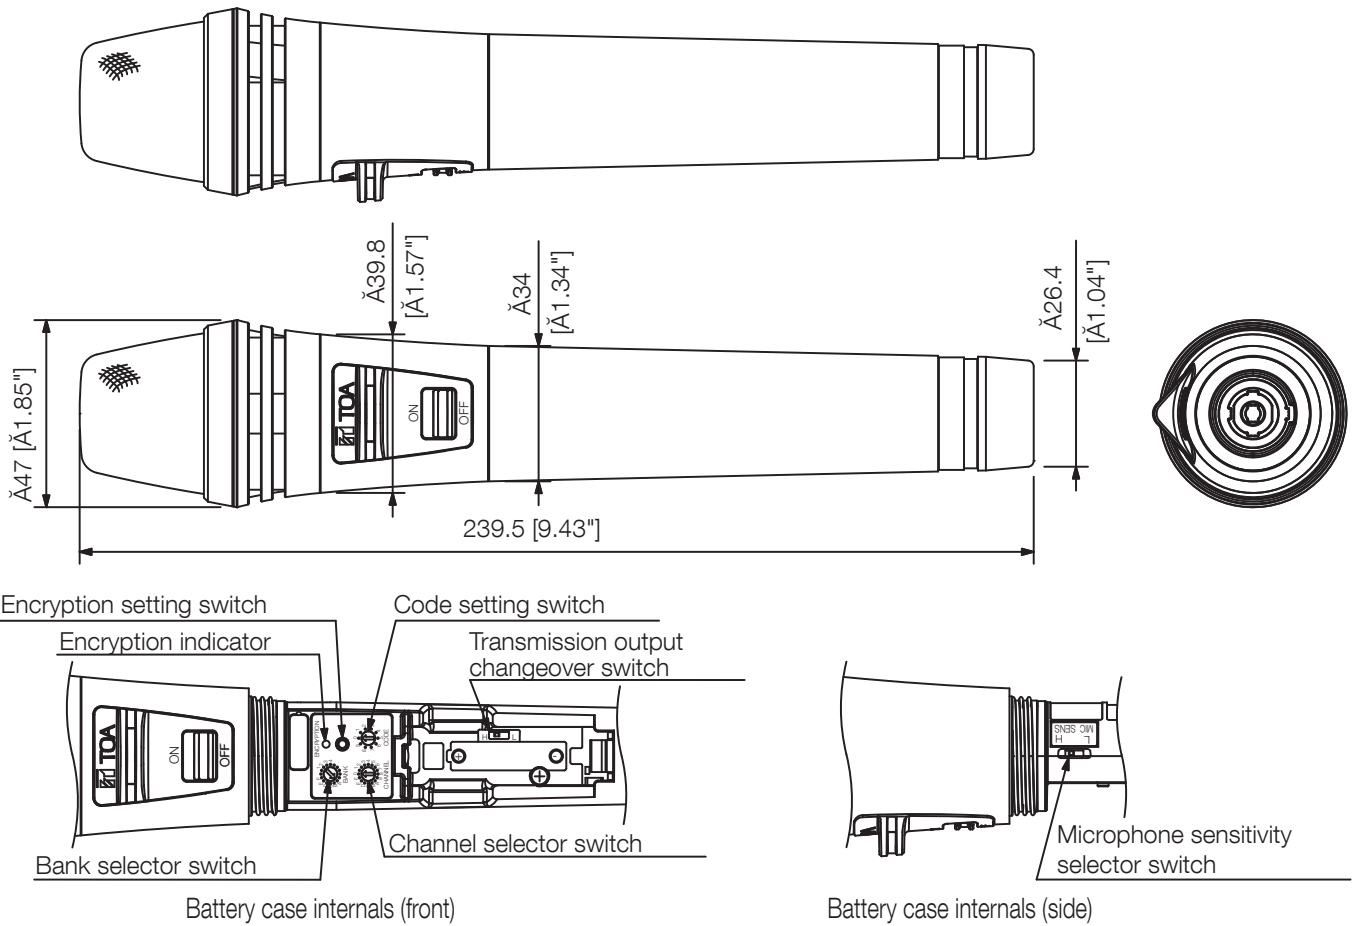

UNIT:mm

SCALE:1/2