

TS-D1000-SU

The TS-D1000-SU sub control unit is exclusively designed to be used with the digital conference system. It allows easy expansion of the conference system by connecting it to the TS-D1000-MU master control unit. Up to 48 chairman and delegate units can be connected per sub control unit by using easily-obtainable CAT5e STP LAN cables. Up to 5 sub control units can be connected to the master control unit using the supplied LAN cable. With the use of an optional rack mounting bracket, it can be mounted in an EIA standard equipment rack (1 unit size).



Article number:TS-D1000-SU 1CE

Specifications

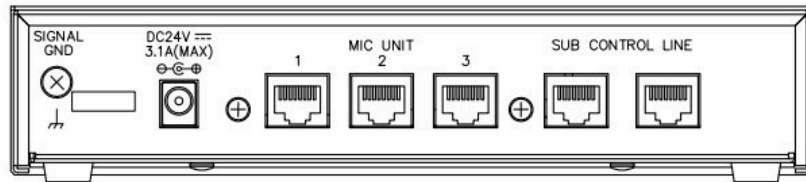
Power source.	100 - 240 V AC, 50 / 60 Hz use of the supplied AC adapter
Power source.	100 - 240 V AC, 50 / 60 Hz use of the supplied AC adapter
Power / current consumption	80 W or less
Power / current consumption	80 W or less
Finish.	Aluminium, Steel plate, 30 % gloss, surface-treated, paint, black,
Operating humidity.	90%RH or less (no condensation)
Operating temperature.	0 °C to +40 °C (32 °F to 104 °F)

TS-D1000-SU

Appearance

■ APPEARANCE

Rear View



210 [8.27"]

Front View



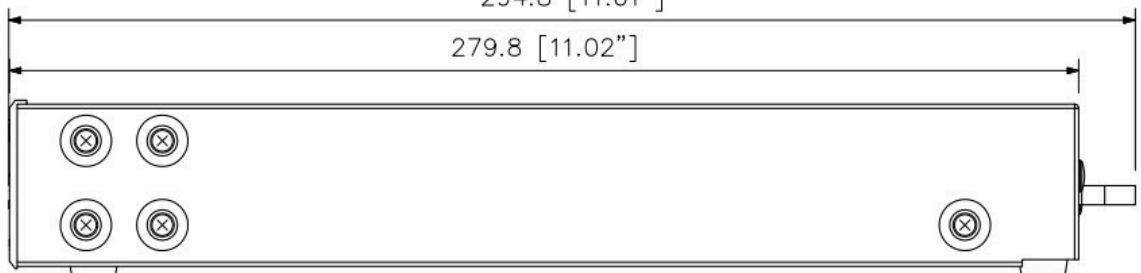
44 [1.73"]





45.8 [1.8"]

294.8 [11.61"]

279.8 [11.02"]

Side View



Version	1CE	4CE	5CE	6CE
AC plug				

UNIT:mm SCALE:1/2