

# TS-D1000-M1

The TS-D1000-M1 microphone is a dedicated component of the digital conference system's chairman unit and delegate unit. Its microphone head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance.



Article number: TS-D1000-M1  
Alternative products: TS-D1000-M2


## Specifications

Directivity	Unidirectional
Frequency response.	100 Hz - 13 kHz
Frequency response.	100 Hz - 13 kHz
Directivity	Unidirectional
Finish.	ABS resin, Stainless steel, black,
Operating humidity.	90%RH or less (no condensation)
Operating temperature.	0 °C to +40 °C (32 °F to 104 °F)

# TS-D1000-M1

Appearance

## ■ APPEARANCE

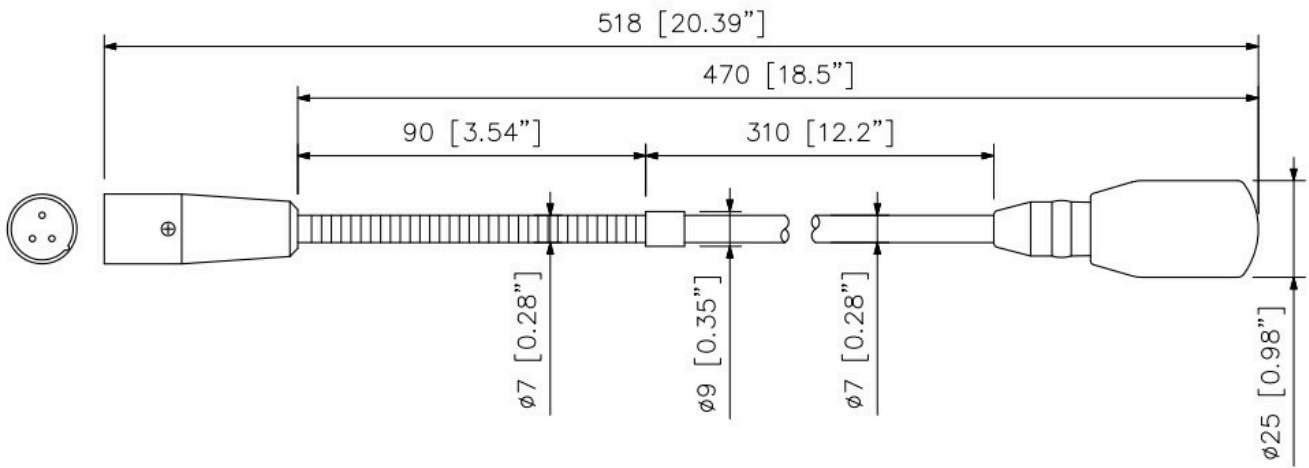

UNIT: mm SCALE: 1/2