

TS-924

The TS-924 Microphone is a dedicated component of the Infrared Conference System's Chairman unit and Delegate unit. Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance. Its gooseneck has two flexible parts, making it possible to adjust the microphone to an optimal position for the user.




Article number:TS-924

Specifications

Indicator	Speech indicator (ring type) red
Directivity	Unidirectional
Frequency response.	100 Hz - 13 kHz
Frequency response.	100 Hz - 13 kHz
Indicator	Speech indicator (ring type) red
Microphone type.	Electret condense microphone
Directivity	Unidirectional
Finish.	Aluminium, Copper alloy, paint, semi-gloss, black,
Operating humidity.	90% RH or less (no condensation)
Operating temperature.	0°C to +40°C (32°F to 104°F)

Appearance



LONG MICROPHONE UNIT

TS-924


DESCRIPTION

The TS-924 Microphone is a dedicated component of the Infrared Conference System's Chairman unit and Delegate unit. Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance. Its gooseneck has two flexible parts, making it possible to adjust the microphone to an optimal position for the user.

SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.4 kΩ
Rated Sensitivity	-37 dB (1 kHz 0 dB = 1 V/Pa)
LED Indicator	Speech indicator (ring type) Red
Frequency Response	100 Hz - 13 kHz
Output Connector	Combined type of XLR-4-32
Flexible Part	2 parts
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Body: Aluminum, black, semi-gloss, paint Shaft: Copper alloy, black, semi-gloss, paint
Length	620 mm (2.03 ft)
Weight	150 g (0.33 lb)
Applicable Unit	Chairman unit: TS-821, TS-921, TS-811, TS-911 Delegate unit: TS-822, TS-922, TS-812, TS-912

APPEARANCE

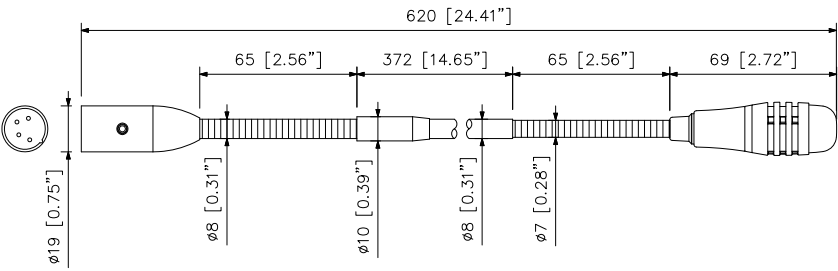

UNIT:mm SCALE:1/2