


Item	ISZN039
Description	Li-HH ALARM C-4 (BC) 8x0.22 LSZH WHITE Cca s1d1a1
Application	Connection between sensors and control units in anti-intrusion systems. The insulation and sheath made with special Halogen Free (LSZH) compounds allowed to obtain the fire reaction class Cca-s1d1a1. These cables can therefore be installed in buildings with a medium risk of fire (hospitals, shopping centers, etc.).

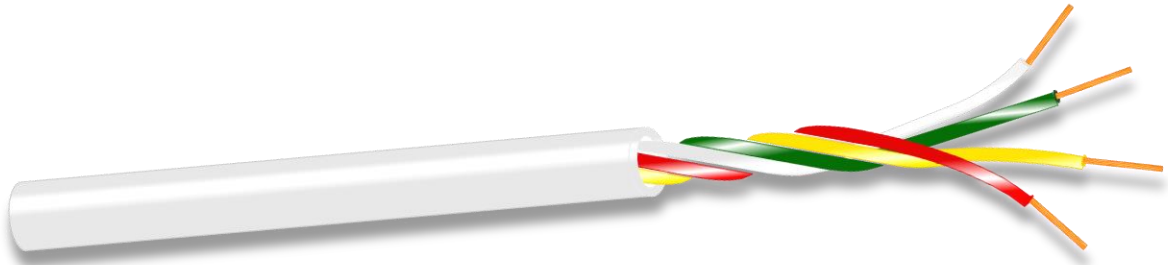

Marking

ISZN039 - PROSPECTA ALARM CABLE Li-HH 8 x 0,22 CEI-UNEL 36762 C-4 (U0=400 V) Cca s1d1a1 (*) (Metering) mt

Color	Blue	(*) = Lot of Production
-------	------	-------------------------

Construction

Cores / Section		nr x mmq	8 x 0,22
Conductor 0,22	Material		Bare Copper (BC)
	Type		Stranded
	Construction	n x mm	7 x 0,15
Insulation	Material		Halogen-free LSZH T17
	Cores Identification	WHITE - RED - YELLOW - GREEN - GREY - ORANGE - LIGHT BLUE - BROWN	Italia Color List
	Standard		
	Diameter	mm	1,00 ± 0,05
	Inner Conductor Resistance	Ohm/km	143,0
Cabling			Conductors cabled in concentric layers
Jacket	Material		Halogen-free LSZH HM5
	Color		White RAL 9010
	Diameter	mm	5,10 ± 0,10

Weight		kg / km	28,0
--------	--	---------	------

Technical Data

Peak Operating Voltage		Volt	250
Voltage Rating Uo/U		Volt	400
Test Voltage		Volt (Ac)	2000
Insulation Resistance		MOhm / km	> 20
Temperature Range	Fixed Installation	°C	- 15 / + 70
Minimum Bending Radius	Fixed Installation		10 x Diameter

Standards

Fire Behaviour (according to EN 50575)		Euroclass	Cca s1d1a1
DOP Nr.			F005

Product Manager
(Davide Eng. Bagnacani)

Issue date 30/09/2021
Version 30/09/2021
Print date 30/09/2021