



WA-AB 06-100/T-EN54V

- Ball-proof
- Wall- and ceiling mounting
- BS 5839



EN 54-24:2008
Ref. Nr.: 008-13
ID-Code: SAA-LS08
1438-CPR-0230

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The WA-AB 06-100/T-EN54V is designed with two independent speakers and 100V transformers to enable an economic operation of two separated speaker lines (A/B-lines) for highest security demands. In case of a failure of one speaker line the redundancy of the chassis and the transformers will guarantee unimpaired function. Excellent qualified for the installation in sports facilities and schools. The speaker is also compliant with the British Standard BS 5839, Part 8.

The 2x6W powered speaker is equipped with two full-range loudspeakers and two 100V transformer with 3 power adjustments, each. The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability. For additional reliability, a 2-pin-ceramic block, thermal fuses are provided and the speaker chassis are impregnated against wetness.

The speaker is also secured with the high protection class IP 54 against the security risks of environmental influences. Quick and easy mounting with screws.

Technical Data (Electrical)

Description	WA-AB 06-100/T-EN54V
Power	2x 6/3/1,5 W
Impedance (100V)	2 x 1667/3333/6667 ohm
Frequency Range	227 - 14.600 Hz (single) 224 - 14.300 Hz (double)
Frequency Response	165 - 23.500 Hz (single) 162 - 23.500 Hz (double)
SPL IEC268-5 , 1W/1m	91,0 dB
SPL EN54-24, Pmax/4m	85,0 dB (single) 88,0 dB (double)
Sensitivity EN54-24, 1W/4m	79,6 dB
Sensitivity EN54-24, 1W/1m	91,6 dB
Dispersion -6dB, 500Hz	single h/v 175° double h/v 180°
Dispersion -6dB, 1KHz	single h/v 180°/160° double h/v 145°/130°
Dispersion -6dB, 2KHz	single h/v 150°/135° double h/v 90°/80°
Dispersion -6dB, 4KHz	single h/v 105°/90° double h/v 50°/40°


Technical Data (Mechanical)

Dimensions	252x194x82 mm
IP Rating	IP54
Weight (net)	2,24 kg
Temperature range	- 10 / +55 °C
Mounting	screws
Connector	2-pin ceramic block
Terminal diameter	3,2 mm
Maximum cable cross section	8mm ² (single)
Colour	white


Product Attributes





Technical Diagrams

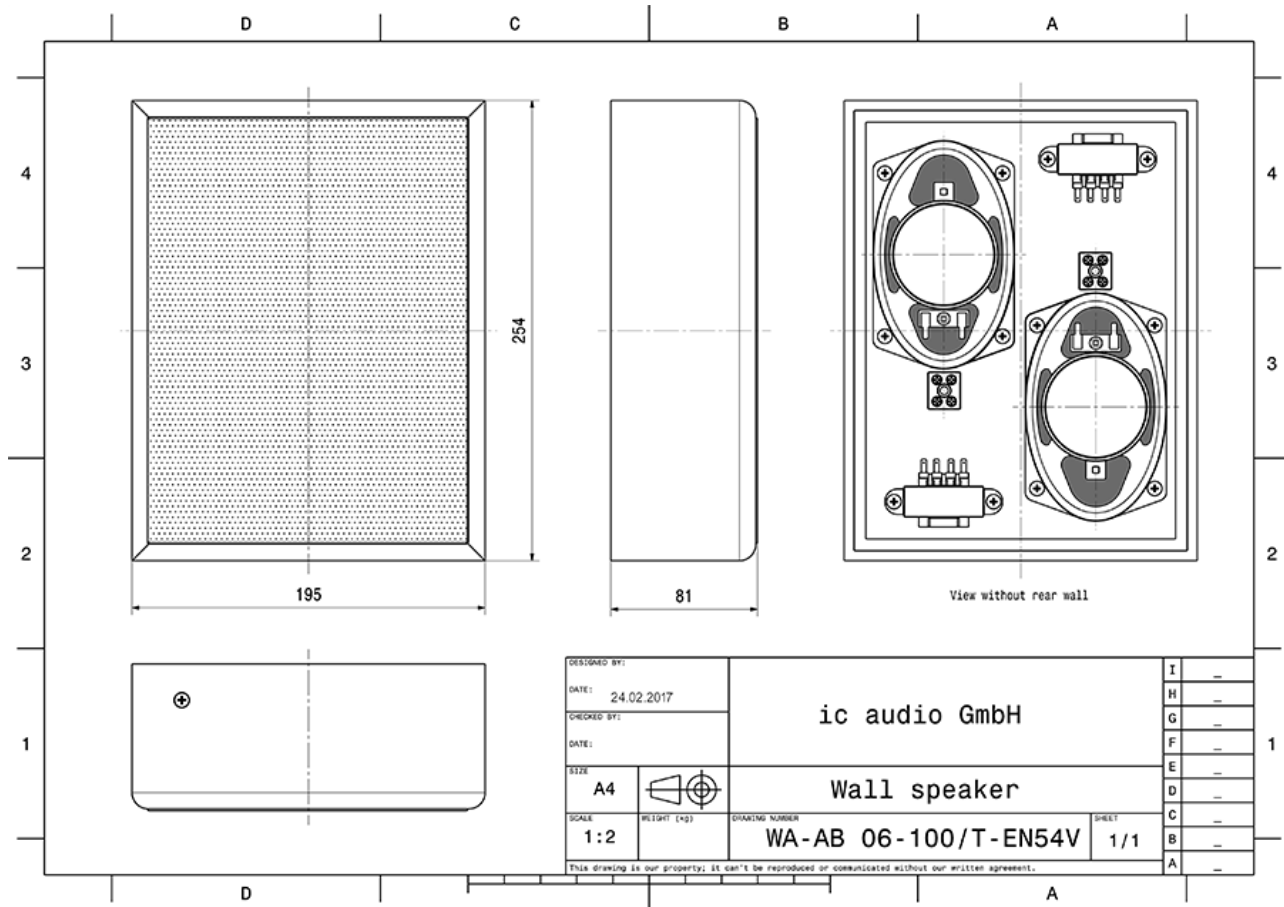

Frequency Response Diagrams

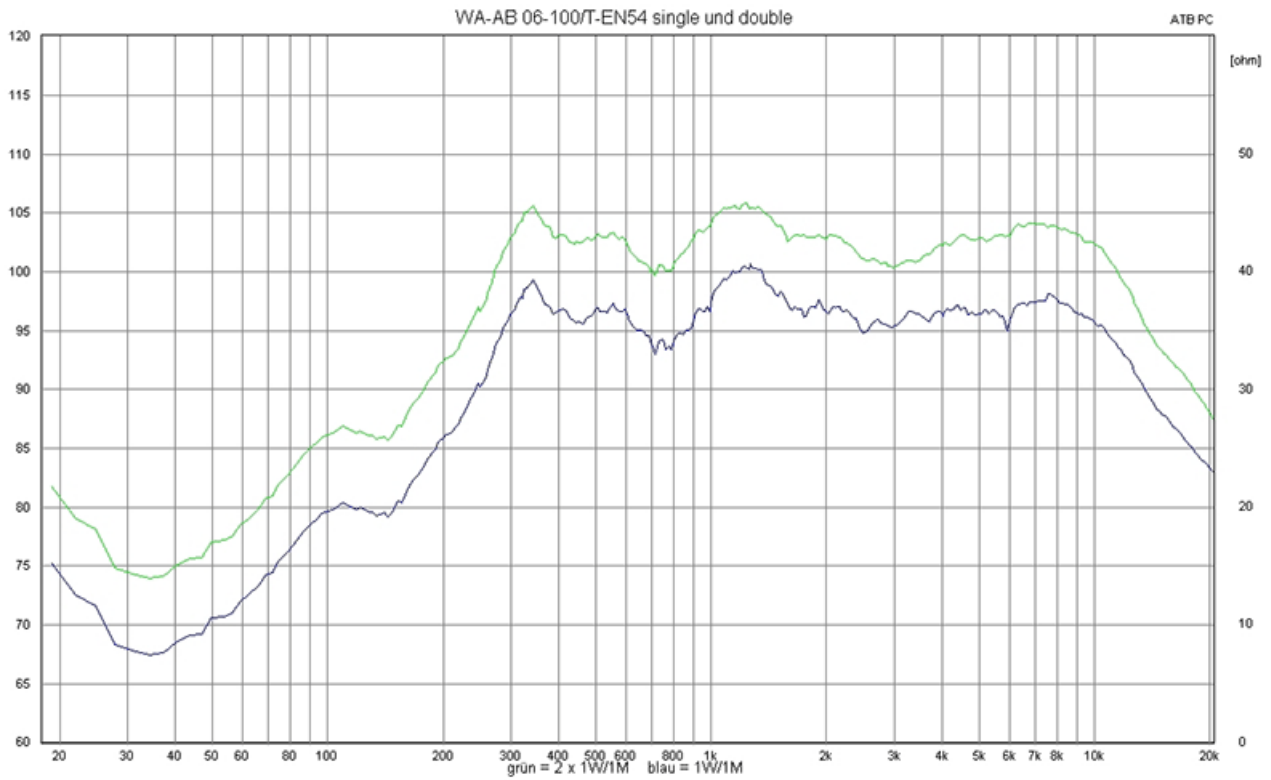


Polar Diagrams

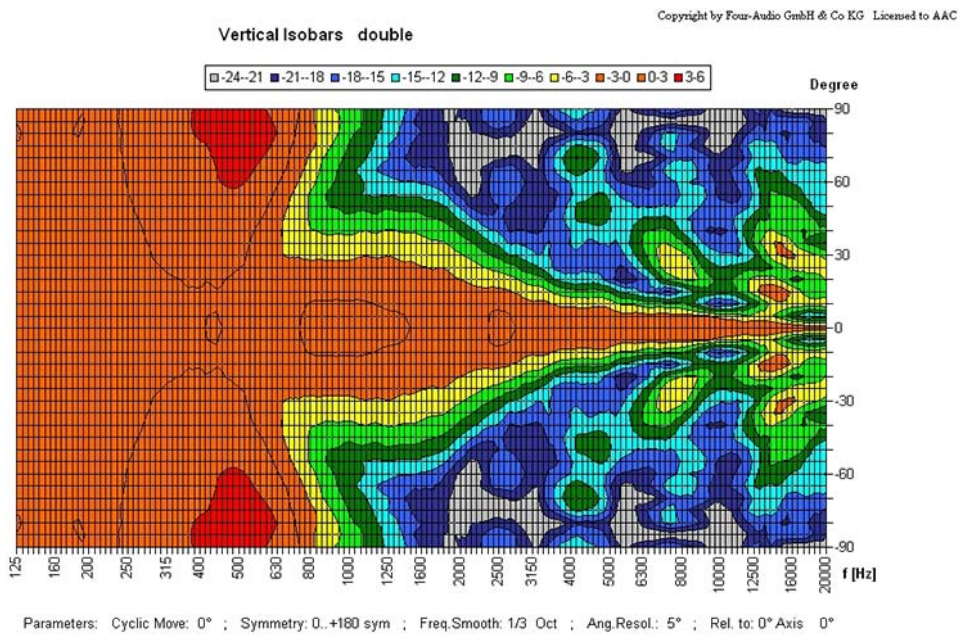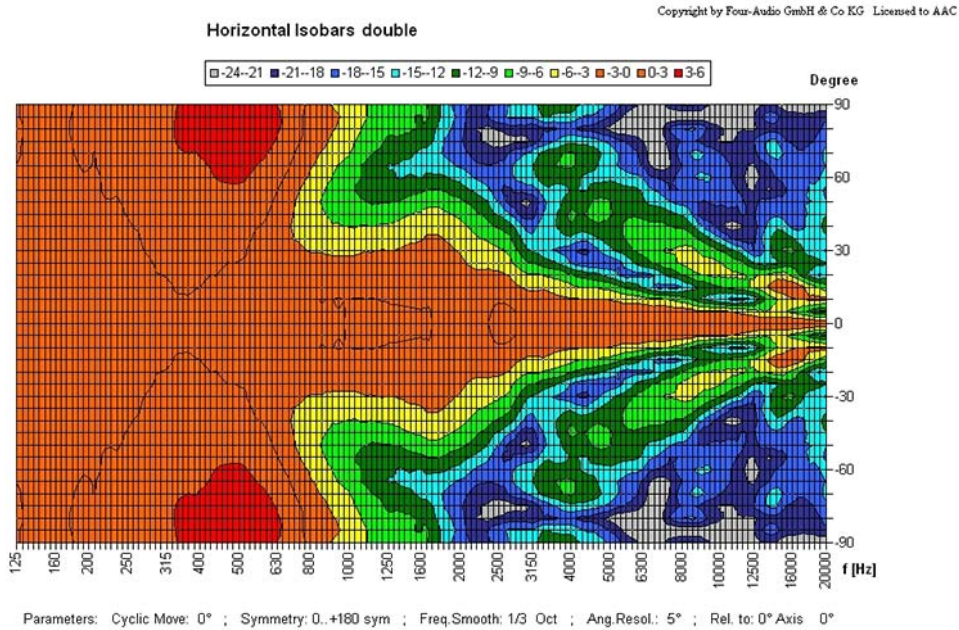

Copyright by Four-Audio GmbH & Co KG Licensed


Horizontal Isobars single

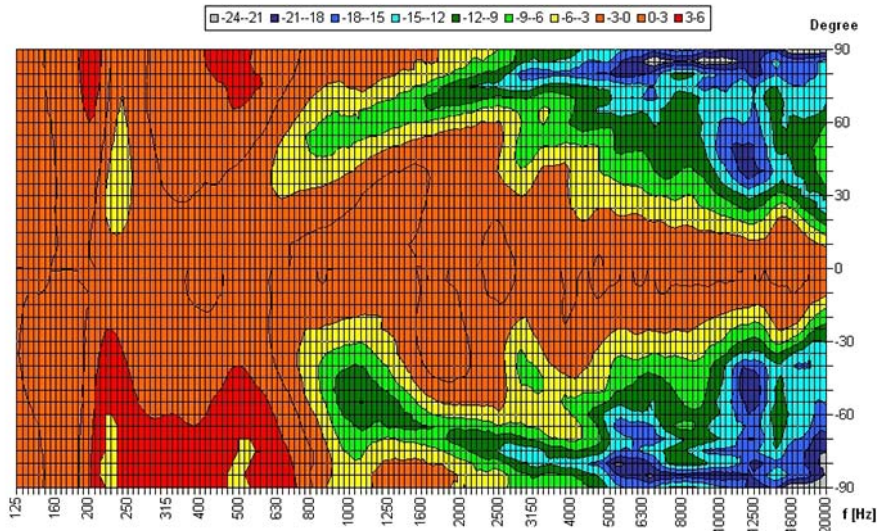

Parameters: Cyclic Move: 0° ; Symmetry: no symmetry ; Freq.Smooth: 1/3 Oct ; Ang.Resol.: 5° ; Rel. to: 0° Axis 0°

Copyright by Four-Audio GmbH & Co KG Licensed

Vertical Isobars single

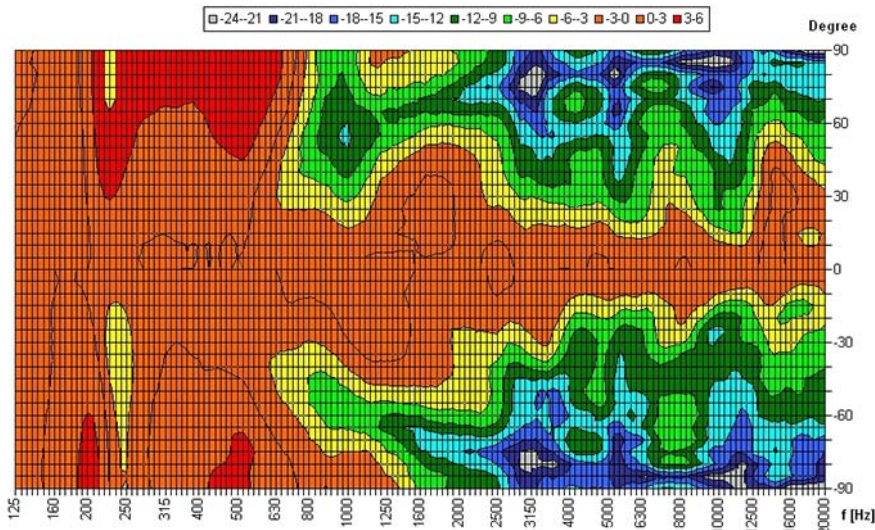

Parameters: Cyclic Move: 0° ; Symmetry: no symmetry ; Freq.Smooth: 1/3 Oct ; Ang.Resol.: 5° ; Rel. to: 0° Axis 0°

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Article Nr.: 20102183V

Packing Unit: 8

