


Quantec Display Interface

Part No. QT615S

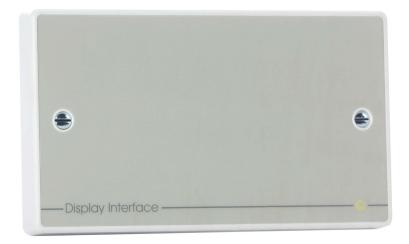

Overview

- Allows a QT608CD1S large corridor display to be connected to Quantec via an RS232 serial interface lead (supplied with the large
- Mounts on a standard UK 20mm double gang flush or surface back box.
- The data connection to the large display is monitored. If this is disconnected or the large display is switched off then the QT615S appears as "Missing" on the Quantec controller



More Information

Technical Specifications

Power requirements Nominal 24V DC (from Quantec Controller/Network)

Quiescent current Less than 5mA.

Indicators None.

Controls None. If controls are required use a QT608C display.

Net +: Net -; RS232 serial port. Connections

 $147~\mathrm{W}$ x 86 H x 23 D mm. Mount on a 35mm deep double gang back box. Product dimensions (mm)

Construction & finish Plastic. IP Rating IP41. Weight 260g.

Operating conditions/temperature -5 $^{\circ}$ C to +40 $^{\circ}$ C. Max relative humidity: 95%.



F 01942 829867

W www.c-tec.com















